


<b>System Model</b>	<b>ES-350-870</b>	
<b>System Performance</b>	<b>Metric</b>	<b>British</b>
<b>Rated Random/Sine Force</b>	350/250 kN	78000/56000 lbs
<b>Rated Shock Force</b>	700/1050* kN	157000/230000* lbf
<b>Usable Frequency</b>	2-1700 Hz	
<b>Maximum Velocity</b>	2/2.5* m/s	78.7/98.4* in/s
<b>Maximum Acceleration</b>	1000 m/s <sup>2</sup>	100 g
<b>Maximum Payload</b>	6000 kg	13227 lbs
<b>Maximum Displacement p-p</b>	51 mm	2 in
<b>Resonance Frequency</b>	1600Hz±5%	
<b>Shaker Model</b>	<b>ET-350</b>	
<b>Mass of Moving Elements</b>	300	661 lbs
<b>Armature Diameter</b>	870 mm	34.2 in
<b>Weight</b>	About 23000 kg	About 50706 lbs
<b>Body Suspension Natural Frequency</b>	2.5 Hz	2.5 Hz
<b>Dimension L×W×H</b>	2875×1910×1981 mm	113.1×75.2×78 in
<b>Power Amplifier Model</b>	<b>DA-420</b>	
<b>Power</b>	420 kVA	
<b>Power Supply Requirement</b>	560kVA	
<b>Weight</b>	About 6100 kg	About 13448 lbs
<b>Dimension L×W×H</b>	4720×850×1983 mm	185.8×33.5×78 in
<b>Cooling Type</b>	<b>Water Cooling</b>	
<b>Cooling Unit Model</b>	<b>CU-3</b>	
<b>Internal Circle Water Flow (Distilled Water)</b>	120 L/min	26.4 gal/min
<b>Internal Circle Water Pressure (Distilled Water)</b>	1 Mpa	145 psi
<b>External Circle Water Flow (City Water)</b>	320 L/min	70.4 gal/min
<b>External Circle Water</b>	0.25~0.4 Mpa	36-58 psi

<b>Pressure (City Water)</b>		
<b>Water Pump Power (Internal/External)kW</b>	8/6.5 kW	
<b>Distilled Water Requirement</b>	Hardness 30ppm, PH7~8, Conductivity 1Us/cm	
<b>Unit Weight (kg)</b>	About 300 kg	About 661 lbs
<b>Dimension L×W×H</b>	610×850×1983 mm	24×33.5×78 in

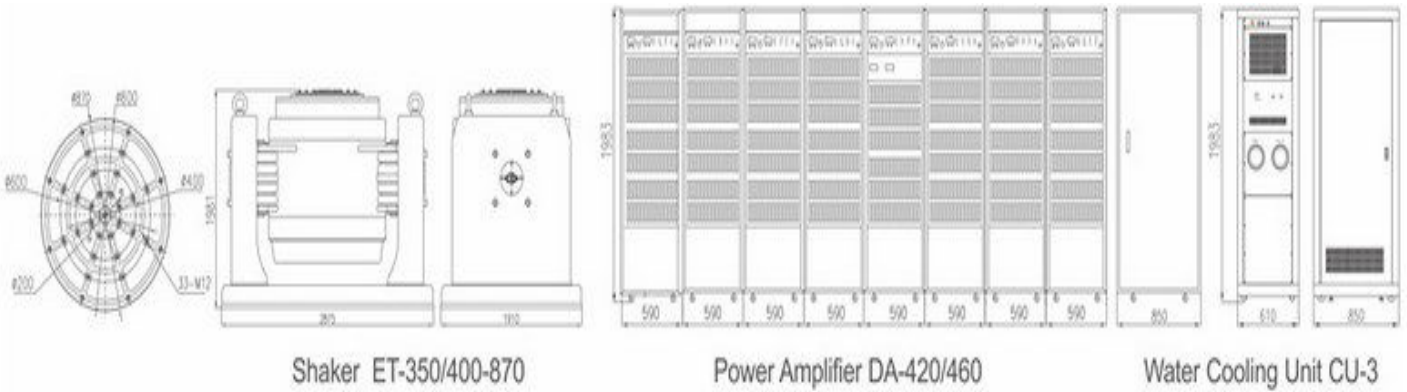

NOTE: In keeping with our commitment to continuous product improvement, the information herein is subject to change.  
Copyright 2012 Dongling Vibration Test Instrument Co., Ltd. All rights reserved.